

ATH Comfort Lift 2.40

Product Images



Description

- Electro-hydraulic 2-post lift with quick lift unit and load-dependent lowering function
- Two control units for flexible use on both columns
- Energy set (230V / compressed air / 12V) on the main post
- Safety Control: Electromagnetic safety locks that automatically unlock with lifting and lowering
- Safety Lock: ability to lock the load on to the safety mechanism
- Multifunctional mounting via 3-part support arms and double telescopic support plates
- Very low drive-over plate (height = 20mm) to protect hydraulic hose and synchronization cables

Additional Information

Rated load capacity	4.000 kg
Lifting height max.	2.000 mm
Drive-through width	2.500 mm
Overall width	3.542 mm
Overall height	3.140 mm
Support arms parts	3
Driving power	3 kW
Lifting/Lowering time	ca. 30 s
Power supply voltage	3x 400V / C16A
Concrete strength	min. C20/25 4.000 x 2.000 x 220 mm



ATH W24 LED 2D

Product Images




Description

- Microprocessor-controlled balancing machine for car wheels with integrated calibration routine
- 2D function: automatic distance and wheel diameter measurement (manual input of the wheel width)
- Weight position display via the digital LED display
- Program selection between static and dynamic balancing, as well as various ALU programs, ALU weight optimization and rear spoke placement
- Pedal-operated parking brake for easy attachment of the weights
- Integrated laser at 6 o'clock for precise positioning
- Measuring arm made of aluminium with a special adhesive weight holder
- Ideally suited for car wheels, with optional accessories also for motorcycle and light truck wheels

Additional Information

Center hole diameter rim	45 – 130 mm
Measurement tolerance	± 1 g
Measuring time	8 s
Measuring speed	200 U/min
Rim width	1,5 – 20 "
Rim diameter	10 – 24 "
Max. wheel diameter	900 mm
Wheel weight max.	65 kg
Driving power	0,20 kW
Power supply voltage	230V / C16A

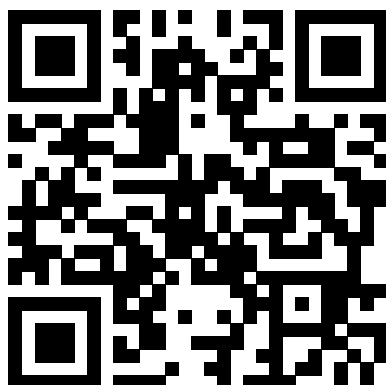

ATH M33 + A24

Product Images



Description

- Tire changer with pneumatic rear swivel and pneumatic auxiliary assembly arm (right)
- Requires little space
- Large clamping range outside up to 22 „
- Pneumatic mounting head clamping
- Self-centering, pre-settable 4-jaw system with two double-acting aluminium clamping cylinders
- Lateral extractor with double-acting aluminum cylinder
- With hand tire inflator, tire lever and maintenance unit
- Ideally suited for car tires, with optional accessories also for motorcycle bikes

Additional Information

Clamping range inner / outer	15 – 24 " / 12 – 22 "
Rim width	4 – 13 "
Max. wheel diameter	1.000 mm
Compressed air connection	10 bar
Bead breaking range	85 – 330 mm
Bead breaker force	2.000 kg
Mounting speeds	7 U/min
Driving power	1,1 kW
Power supply voltage	230V / C16A
Noise level	70 dB(A)

